



Triple-slot phase-shifting cell loaded with one variable capacitance for reflectarray applications

Tony Makdissy, Raphaël Gillard, Erwan Fourn, Etienne Girard, Hervé Legay

► To cite this version:

Tony Makdissy, Raphaël Gillard, Erwan Fourn, Etienne Girard, Hervé Legay. Triple-slot phase-shifting cell loaded with one variable capacitance for reflectarray applications. *Electronics Letters*, 2012, 48 (21), pp.426-427. hal-00772503

HAL Id: hal-00772503

<https://hal.science/hal-00772503>

Submitted on 10 Jan 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.


Triple-Slot Phase-Shifting Cell Loaded with One Variable Capacitance for Reflectarray Applications

T. Makdissy, R. Gillard, E. Fourn, E. Girard and H. Legay

This letter presents a new linearly polarized phase-shifting cell for reflectarray applications. It consists of three parallel rectangular slots etched in a ground plane and loaded with a combination of variable and fixed capacitances to provide a 2-bit phase-shifter. The proposed cell is fabricated and characterized in C-band using the waveguide simulation approach with four fixed states.

Introduction: Active reflectarrays are promising solutions for reconfigurable radiating apertures at reasonable cost [1]. One of the main challenges is to design phase-shifting cells whose phase can be controlled dynamically over a 360° phase range with smooth frequency variations, low losses and reduced number of active elements. MEMS [2] or diodes [3] are usually used to dynamically control the electric length of a single resonator. On the other hand, multiple resonators have been advantageously used to increase the overall phase range of passive cells up to twice or three times the required 360° value [4, 5]. Single-layer structures are preferable as they result in a simpler technological process. In [6] and [7], simulations showed the capabilities of reconfigurable single-layer structures, using either 2- or 3-slot resonators controlled by a convenient capacitive loading. This tuning mechanism is appropriate to modulate the slot's length without fundamentally changing its resonant mode (as may be observed for switched multiple-resonators [8]). In this letter, experimental validation for the new triple-slot phase-shifting cell is presented; we demonstrate that very satisfying performances can be achieved with just one variable capacitance loading the central slot while benefiting from the bandwidth enlargement brought by both external slots.

Proposed phase-shifting cell: The proposed cell is illustrated in Fig. 1. It consists of a set of three parallel rectangular slots etched in a square ground plane. Two different slot lengths (L_{S1} for external slots and L_{S2} for central slot) are combined to improve the bandwidth. The ground plane is printed on a 1.6 mm substrate with 2.17 dielectric constant, suspended 15.7mm above a square metallic cavity ($m^2=35*35\text{mm}^2$). The principle of this structure is to control the reflected phase by a single capacitance loading the central slot. The value of the capacitance can be tuned by choosing the electrode's length (L). In a future active version, the gap capacitance could be replaced either by capacitive MEMS or by varicap diode. The external slots are used to achieve a smooth phase evolution (and consequently a large bandwidth). To do so, the resonant frequency of these external slots has to be optimized. Here, this is done by loading the external slots with a fixed capacitance ($L=1\text{mm}$). Indeed, this capacitance increases the electrical length of the slots with no need to bend them or to raise cell size, which improves the compactness.

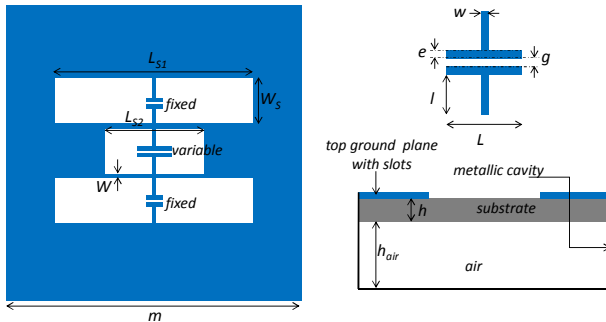

$f_0=5.35\text{GHz}$, $h_{\text{air}}=15.7\text{mm}$, $h=1.6\text{mm}$, $L_{S1}=21\text{mm}$, $L_{S2}=10\text{mm}$, $W_S=5\text{mm}$, $W=0.2\text{mm}$, $m=35\text{mm}$, $w=0.5\text{mm}$, $l=2.2\text{mm}$, $e=0.2\text{mm}$, $g=0.2\text{mm}$, $L=1\text{mm}$ for external capacitances, L variable for central capacitance

Fig. 1 Proposed phase-shifting cell.

Simulation and experimental results: The performances of the proposed topology have been assessed at 5.35GHz. Numerical characterizations with HFSS® have been carried out using the waveguide simulator approach by placing the cell at the end of a $35*35\text{mm}^2$ square metallic waveguide. The cell is excited with the TE_{10} mode with electric field perpendicular to the slots. In order to validate the simulations and to assess the potential of the cell to achieve the desired behaviour, four different layouts, each of which corresponds to a different value of the central slot capacitance length (L), were fabricated and measured in a C-band metallic waveguide. The simulated and measured reflected phases are given in Fig. 2. The agreement between both is quite good; the deviation is less than 45°. Fig. 3 shows the stability of the phase standard deviation which reflects the parallelism between the curves. The ideal value is 26° for a 2-bit phase-shifter. Here, a 31° value is measured, in the useful band from 5.2GHz to 5.6GHz (7.4% bandwidth), corresponding to a 1.74-bit phase-shifter. The maximum measured losses are less than 0.8 dB in the useful band as it is illustrated in Fig. 4.

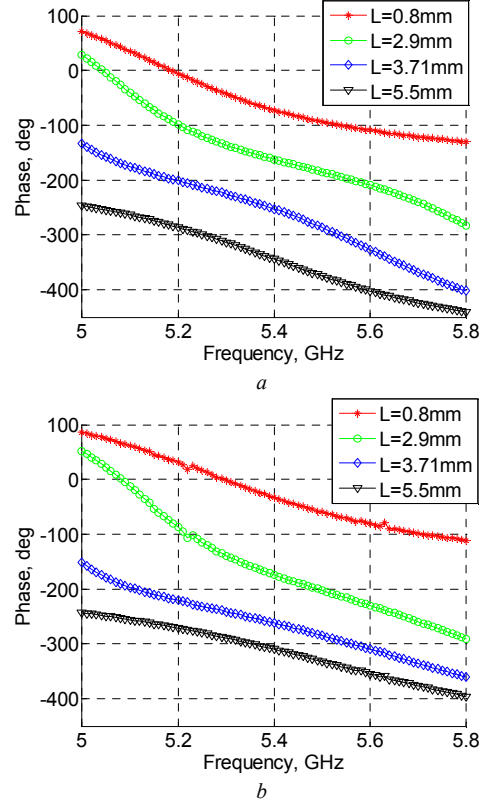


Fig. 2 Phase versus frequency for different values of the loading capacitance.
a Simulated reflected phase
b Measured reflected phase

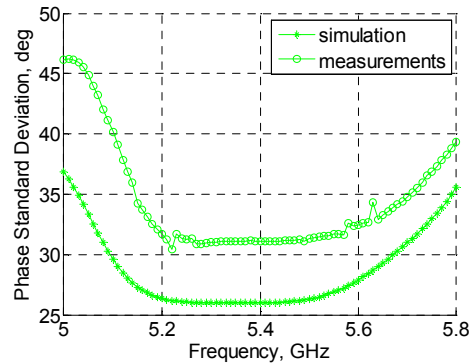


Fig. 3 Simulated and measured phase standard deviation versus frequency.

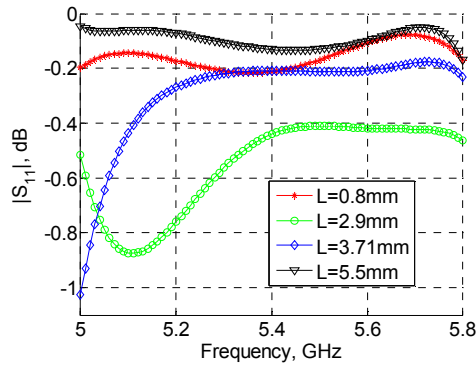


Fig. 4 Measured losses versus frequency for different values of the loading capacitance

Conclusion: In this letter, a new phase-shifting cell for reflectarrays has been proposed. It uses two external slots loaded with the same fixed capacitance, and a central slot whose loading capacitance is varied. Measurements, in good agreement with simulations, have demonstrated that the phase varies quite linearly with frequency and that the modification of the central capacitance's value is sufficient to provide 4 uniformly distributed phase states with low losses and low dispersion.

Acknowledgments: This work was carried out within the French R3MEMS ANR project.

T. Makdissy, R. Gillard and E. Fourn (Université Européenne de Bretagne, INSA, IETR, UMR 6164, F-35708 Rennes, France)

E-mail: Tony.Makdissy@insa-rennes.fr

E. Girard and H. Legay (Thales Alenia Space, 26, Av. Jean Francois Champollion, 31037 Toulouse Cedex 1, France)

References

1. O. Bayraktar, O. A. Civi, and T. Akin, "Beam Switching Reflectarray Monolithically Integrated with RF MEMS Switches," *IEEE Transactions on Antennas and Propagation*, vol. 60, no. 2, pp. 854-862, Feb. 2012
2. J. Perruisseau-Carrier and A. K. Skrivervik, "Monolithic MEMS-based reflectarray cell digitally reconfigurable over a 360° phase range," *IEEE AWP Lett.*, vol. 7, pp. 138-141, 2008
3. L. Boccia, G. Amendola, and G. Di Massa, "Performance improvement for a varactor-loaded reflectarray element," *IEEE Trans. Antennas Propag.*, 2010, 58, (2), pp. 585-589
4. J. Encinar and J. Agustin Zornoza, "Broadband design of three-layer printed reflectarrays," *IEEE Trans. Antennas Propag.*, vol. 51, no. 7, pp. 1662-1664, Jul. 2003
5. M. R. Chaharmir, J. Shaker, and H. Legay, "Broadband Design of a Single Layer Large Reflectarray Using Multi Cross Loop Elements," *IEEE Trans. Antennas Propag.*, vol. 57, no. 10, pp. 3363-3366, Oct. 2009
6. T. Makdissy, R. Gillard, E. Fourn, E. Girard, H. Legay, "Dual-annular Slot Phase-Shifting Cell loaded with MEMS Switches for Reconfigurable Reflectarrays," 33rd ESA Antenna Workshop on Challenges for Space Antenna Systems, Netherlands, 18-21 October 2011
7. T. Makdissy, R. Gillard, E. Fourn, E. Girard, H. Legay, "Triple-slot phase-shifting cell loaded with capacitances for reflectarray applications," *European Conference on Antennas and Propagation EuCAP 2012*, Prague, 26-30 March 2012
8. H. Salti, E. Fourn, R. Gillard, E. Girard, H. Legay, "Pharmacist Cross phase-shifting cell loaded with MEMS switches for reconfigurable reflectarrays," *European Conference on Antennas and Propagation EuCAP 2010*, Barcelona, Spain, 12-16 April 2010